


Toku and Tamco offers a variety of tampers and rammers for the job site, foundry, or mill. All tools feature heat treated alloy steel cylinders, innovative features and rugged construction. Toku and Tamco have the ideal tool for any of your soil or substrate compaction needs.

These rugged and reliable tools will provide years of service on any job site.

Optional steel or rubber heads are available for all Toku and Tamco rammers or tampers.

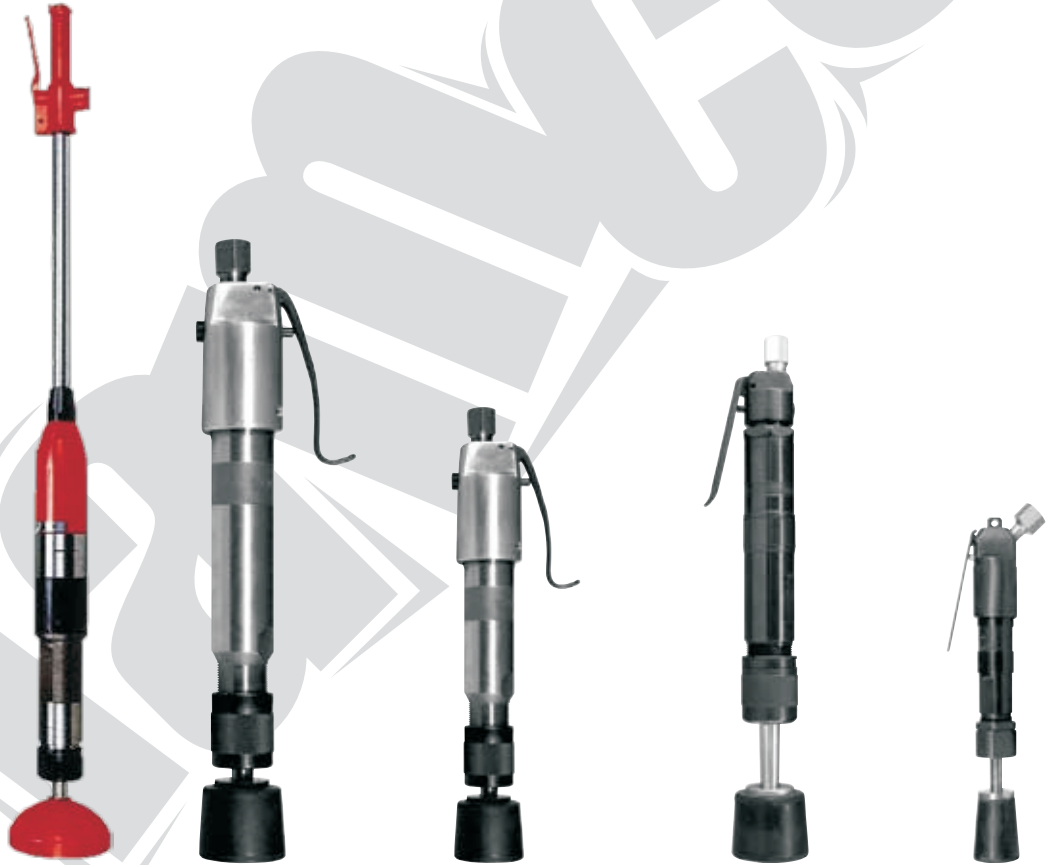

	TOKUJET-06	SF-1BA	SF-2BAR	SF-OBR	SF-00BA
Bore	1-1/2"(38mm)	1"	1"	1"	11/16"
Stroke	5-1/2"(140mm)	4"	4"	2"	2"
Taper	N/A	0.802"	0.802"	0.802"	S Taper
Impact Rate	N/A	1,240 B.P.M.	1,725 B.P.M.	2,500 B.P.M.	1,600 B.P.M.
Length	49"(1240mm)	20-1/4"	15-1/4"	16-1/2"	11-3/4"
Weight	39.6 lbs. (18.0 kg.)	10 lbs.	7.125 lbs.	6.65 lbs.	3.75 lbs.
Air Inlet	1/2"	3/8"	3/8"	1/4"	3/8"
Butt Diameter	6"	2-1/2"	2-1/2"	2-1/2"	1-3/4"
Air Consumption	35.2 C.F.M.	N/A	N/A	N/A	N/A